



## DECKSHIELD

Car Park Decking Systems for:

- ✓ Exposed Decks
- ✓ Internal Decks
- ✓ Ramps
- ✓ Walkways/Stairwells
- ✓ Demarcation
- ✓ Service Corridors

# Deckshield Range Technical Profile



Multi storey car parks have always been many customers' first point of contact with commercial destinations, but it is only recently that developers have made efforts to improve the quality of the car park experience.

Although often underestimated, the correct specification of waterproofing and surfacing materials is critical, within the car park environment, to delivering a long-term, structurally protected and safe facility for car park operators and vehicle owners.

Flowcrete's Deckshield range offers a number of colourful deck coating solutions geared up to provide slip-resistance, durability and an excellent service life as well as stand-up to common car park structural problems.



## Total Car Park Decking Solutions

|                                      |   |
|--------------------------------------|---|
| Fast Cure Car Park Decking           | ✓ |
| Decorative Anti-Carbonation Coatings | ✓ |
| Cementitious Concrete Repairs        | ✓ |
| Structural Expansion Joints          | ✓ |
| Protective Column Guards             | ✓ |
| Traffic Calming Speed Bumps          | ✓ |

## Performance Benefits

|   |  |
|---|--|
| ✓ | Meets requirements of BS EN 1504                       |
| ✓ | Single source warranty                                 |
| ✓ | Installed by approved applicators                      |
| ✓ | Resistant to chemicals, impact, heavy traffic and wear |
| ✓ | Attractive finish brightens dull car park environments |

# Deckshield ID (2–3mm)

Deckshield ID is a flexible, solvent free polyurethane car park deck coating system for intermediate decks of multi storey structures.

Deckshield cosmetically enhances and reduces noise, making multi storey car parks brighter, safer environments to visit.



## Environmentally Friendly:

Low in Volatile Organic Compounds (VOCs) and solvent free.



## Attractive:

Brightens up dull, dark and musty car park environments.



## Resistant:

Excellent resistance to chemicals, fire and has a low slip potential.



## Reduces Noise:

Minimises unwanted noise from tyre squeal.



## Heavy Duty:

Heavy duty version available for ramps, turning circles and drive aisles.

## Standard Colours



Forest Green



Dark Grey



Mid Grey



Tile Red



Traffic Purple



Traffic Blue

## Technical Profile

### TEMPERATURE RESISTANCE

Softens over 70°C, hardens on cooling

### REACTION TO FIRE

EN 13501-1

B<sub>FL</sub> - s1

### CAPILLARY ABSORPTION & PERMEABILITY TO WATER

EN 1062-3

w < 0.1 kg/m<sup>2</sup> × h<sup>0.5</sup>

### SLIP / SKID RESISTANCE

EN 13036-4

Class I: >40 units wet tested  
Class II: >40 units dry tested

### RESISTANCE TO CHLORIDE IONS

DOT BD47/94: Appendix B, Method B4,2(d)

No chloride ion penetration after 28 days

### ADHESION BY PULL-OFF TEST

EN 1542

≥ 1.5 N/mm<sup>2</sup>  
(with or without trafficking)

### ABRASION RESISTANCE

EN ISO 5470-1

Weight loss < 3000mg using H22 wheel, 1000 cycles, load 1000g

### IMPACT RESISTANCE

EN ISO 6272-1


Class II: ≥ 10 Nm

### RESISTANCE TO CHEMICAL ATTACK

BS EN ISO 2812-1

Resistant to petrol, diesel, antifreeze, hydraulic fluids and battery acids.

| SPEED OF CURE**    | 10°C    | 20°C   | 30°C   |
|--------------------|---------|--------|--------|
| Light Traffic      | 30 hrs  | 16 hrs | 10 hrs |
| Full Traffic       | 36 hrs  | 24 hrs | 16 hrs |
| Full Chemical Cure | 12 days | 7 days | 5 days |

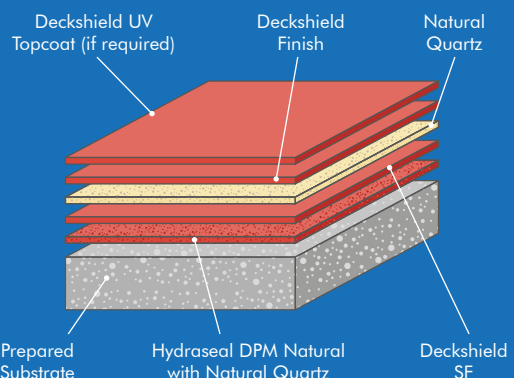

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

# Deckshield ED (3–4mm)

Deckshield ED is a flexible polyurethane deck coating system providing a colourful crack bridging, waterproof surface for exposed decks.

Deckshield ED cosmetically enhances and reduces noise, making exposed car park decks brighter, safer environments to visit.



## Environmentally Friendly:

Low in Volatile Organic Compounds (VOCs) and solvent free.



## Attractive:

Brightens up dull, dark and musty car park environments.



## Resistant:

Excellent resistance to chemicals, fire and has a low slip potential.



## Reduces Noise:

Minimises unwanted noise from tyre squeal.



## Heavy Duty:

Heavy duty version available for ramps, turning circles and drive aisles.

## Standard Colours



Forest Green



Dark Grey



Mid Grey



Tile Red




Traffic Purple



Traffic Blue

## Technical Profile

| TEMPERATURE RESISTANCE                       |   |
|--|---|
| Softens over 70°C, hardens on cooling        |   |
| REACTION TO FIRE                             |   |
| EN 13501-1                                   | B <sub>FL</sub> - s1  |
| CAPILLARY ABSORPTION & PERMEABILITY TO WATER |   |
| EN 1062-3                                    | w < 0.1kg/m <sup>2</sup> × h <sup>0.5</sup>                                       |
| SLIP / SKID RESISTANCE                       |   |
| EN 13036-4                                   | Class III: >55 units Wet (outside)  |
| RESISTANCE TO CHLORIDE IONS                  |   |
| DOT BD47/94: Appendix B, Method B4,2(d)      | No chloride ion penetration after 28 days   |
| ADHESION BY PULL-OFF TEST                    |   |
| EN 1542                                      | ≥ 1.5 N/mm <sup>2</sup> (with or without trafficking)                             |
| ABRASION RESISTANCE                          |   |
| EN ISO 5470-1                                | Weight loss < 3000mg using H22 wheel, 1000 cycles, load 1000g                     |
| IMPACT RESISTANCE                            |   |
| EN ISO 6272-1                                | Class II: ≥ 10 Nm   |
| CRACK BRIDGING ABILITY                       |   |
| EN 1062-7 Method A, Table 6                  | Class A5 (-20°C)  |
| EN 1062-7 Method B, Table 7                  | Class 4.2 (-20°C)   |
| ARTIFICIAL WEATHERING                        |   |
| EN 1062-11:2002                              | No blistering, no cracking and no flaking after 2000h of accelerated UV exposure. |

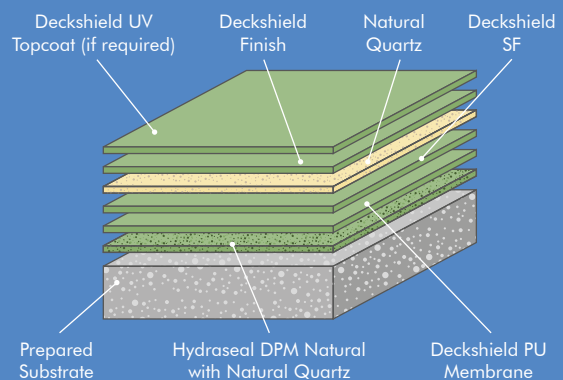

Speed of Cure and Chemical Resistance as per Deckshield ID.

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.



Exit مخرج



L4  
B4  
>>>>

M10A →



# Deckshield Rapide ID (3–4mm)

Deckshield ID Rapide is a MMA car park deck coating system providing a colourful and waterproof surface for intermediate car park decks.

Developed to enable very fast track applications, and reduce downtime, the system is solvent free and also benefits from excellent bond strength.



### Fast Curing:

Reduced drying times to minimise disruption to car park users.



### Attractive:

Brightens up dull, dark and musty car park environments.



### Resistant:

Waterproof with high resistance to chemicals, fire and has low slip potential.



### Reduces Noise:

Minimises unwanted noise from tyre squeal.



### Heavy Duty:

Heavy duty version available for ramps, turning circles and drive aisles.

## Standard Colours



Traffic Blue



Forest Green



Dark Grey



Mid Grey



Tile Red




Traffic Purple

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

## Technical Profile

| REACTION TO FIRE              |  |
|-------------------------------|--|
| EN 13501-1                    | C <sub>FL</sub> - s1   |
| SLIP / SKID RESISTANCE        |  |
| EN 13036-4                    | Class I: >40 units wet tested<br>Class II: >40 units dry tested              |
| ABRASION RESISTANCE           |  |
| EN ISO 5470-1                 | Weight loss <3000mg using H22 wheel, 1000 cycles, load 1000g                 |
| IMPACT RESISTANCE             |  |
| EN ISO 6272-1                 | Class II: ≥ 10 Nm  |
| RESISTANCE TO CHEMICAL ATTACK |  |
| BS EN ISO 2812-1              | Resistant to petrol, diesel, antifreeze, hydraulic fluids and battery acids. |
| ADHESION BY PULL-OFF TEST     |  |
| EN 1542                       | ≥ 1.5 N/mm <sup>2</sup> (with or without trafficking)                        |

| SPEED OF CURE (PER LAYER)*   |         |
|------------------------------|---------|
| Walk On                      | 1 hr    |
| Full Traffic & Chemical Cure | 2–3 hrs |

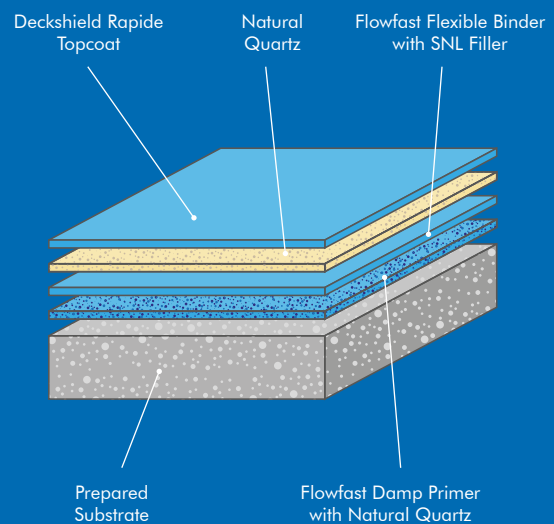

\* Cure times at temperatures between 0-30°C can be achieved by altering the quantity of catalyst used. For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.

# Deckshield Rapide ED

(4-5mm)

Deckshield ED Rapide is a MMA car park deck coating system providing a colourful watertight, hard-wearing surface for exposed decks.

Deckshield ED Rapide enables fast track applications to dramatically reduce down time, whilst also offering slip resistance properties.



### Fast Curing:

Reduced drying times to minimise disruption to car park users.



### Attractive:

Brightens up dull, dark and musty car park environments.



### Resistant:

Waterproof with high resistance to chemicals, fire and has low slip potential.



### Reduces Noise:

Minimises unwanted noise from tyre squeal.



### Heavy Duty:

Heavy duty version available for ramps, turning circles and drive aisles.

## Standard Colours



Traffic Blue



Forest Green



Dark Grey



Tile Red



Mid Grey




Traffic Purple

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

## Technical Profile

| REACTION TO FIRE                             |   |
|--|---|
| EN 13501-1                                   | C <sub>FL</sub> - s1  |
| CAPILLARY ABSORPTION & PERMEABILITY TO WATER |   |
| EN 1062-3                                    | w < 0.1kg/m <sup>2</sup> × h <sup>0.5</sup>                                       |
| SLIP / SKID RESISTANCE                       |   |
| EN 13036-4                                   | Class III: >55 units Wet (outside)  |
| RESISTANCE TO CHLORIDE IONS                  |   |
| DOT BD47/94: Appendix B, Method B4,2(d)      | No chloride ion penetration after 28 days   |
| ADHESION BY PULL-OFF TEST                    |   |
| EN 1542                                      | ≥ 1.5 N/mm <sup>2</sup> (with or without trafficking)                             |
| ABRASION RESISTANCE                          |   |
| EN ISO 5470-1                                | Weight loss < 3000mg using H22 wheel, 1000 cycles, load 1000g                     |
| IMPACT RESISTANCE                            |   |
| EN ISO 6272-1                                | Class II: ≥ 10 Nm   |
| CRACK BRIDGING ABILITY                       |   |
| EN 1062-7 Method A, Table 6                  | Class A3 (-20°C)  |
| ARTIFICIAL WEATHERING                        |   |
| EN 1062-11:2002                              | No blistering, no cracking and no flaking after 2000h of accelerated UV exposure. |

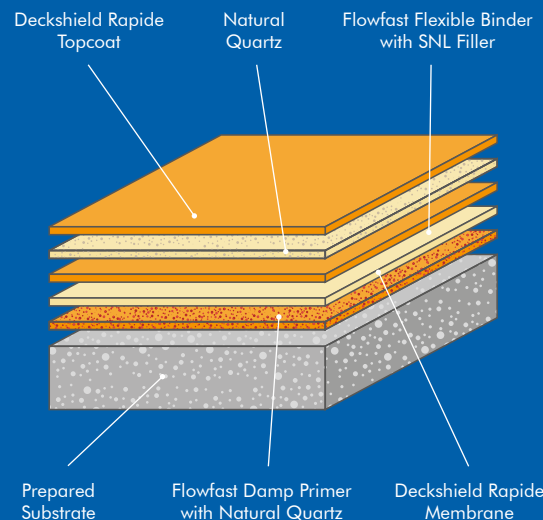

Speed of Cure and Chemical Resistance as per Deckshield Rapide ID.

\*\* Cure times at temperatures between 0-30 °C can be achieved by altering the quantity of catalyst used. For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.







Reserved  
for disabled  
customers



# Deckshield Linemarker QD (0.11mm)

A single component, solvent based, high build line marking product used for demarcation in car parks.

Deckshield Linemarker QD is fast drying and boasts good adhesion to a wide range of substrates e.g. wood, steel, concrete and Deckshield car park decking systems.



### Fast Curing:

Reduced drying times to minimise disruption to car park users.



### Bright Colours:

Vivid colours available to improve visibility and safety.



### Durable:

Excellent abrasion resistance to withstand vehicular traffic.

## Standard Colours



White



Traffic Yellow

## Technical Profile

### TEMPERATURE RESISTANCE

Tolerant up to 80°C

### FIRE RESISTANCE

|                                     |                      |
|-------------------------------------|----------------------|
| BS 476-7<br>Surface Spread of Flame | Class 3 (indicative) |
|-------------------------------------|----------------------|

### SLIP RESISTANCE

|                         |                  |
|-------------------------|------------------|
| TRRL Pendulum Slip Test | Dry >90, Wet >40 |
|-------------------------|------------------|

### ABRASION RESISTANCE

|           |           |
|-----------|-----------|
| BS 8204-2 | Class AR2 |
|-----------|-----------|

### CHEMICAL RESISTANCE

Resistant to petrol, diesel and oil

### WATER PERMEABILITY

|              |                   |
|--------------|-------------------|
| Karsten Test | Nil (Impermeable) |
|--------------|-------------------|

### BOND STRENGTH

1.5 MPa\*

| SPEED OF CURE*   | 10°C     | 20°C      | 30°C      |
|------------------|----------|-----------|-----------|
| Dry to no pickup | 40 mins  | 10 mins   | 10 mins   |
| Dry Through Time | 40 mins  | < 20 mins | < 10 mins |
| Full Traffic     | > 12 hrs | > 4 hrs   | > 3 hrs   |
| Overcoating      | > 12 hrs | > 4 hrs   | > 3 hrs   |

\*Assumes concrete compressive strength is greater than 25N/mm<sup>2</sup>



The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.



## Flowcrete around the world

### Manufacturing Centres

|              |                              |                       |                       |   |
|--------------|------------------------------|-----------------------|-----------------------|---|
| UK           | Flowcrete UK Ltd             | Tel: +44 1270 753 000 | Fax: +44 1270 753 333 | Email: <a href="mailto:uk@flowcrete.com">uk@flowcrete.com</a>                   |
| Sweden       | Flowcrete Sweden AB          | Tel: +46 42 600 07 00 | Fax: +46 42 15 50 90  | Email: <a href="mailto:sweden@flowcrete.com">sweden@flowcrete.com</a>           |
| Poland       | Flowcrete Polska Sp. z.o.o.  | Tel: +48 22 879 8907  | Fax: +48 22 879 8918  | Email: <a href="mailto:poland@flowcrete.com">poland@flowcrete.com</a>           |
| India        | Flowcrete India Pvt Ltd      | Tel: +91 44 4202 9831 | Fax: +91 44 4202 9832 | Email: <a href="mailto:india@flowcrete.com">india@flowcrete.com</a>             |
| Malaysia     | Flowcrete Asia Sdn Bhd       | Tel: +60 3 6277 9575  | Fax: +60 3 6277 4645  | Email: <a href="mailto:malaysia@flowcrete.com">malaysia@flowcrete.com</a>       |
| South Africa | Flowcrete SA (Pty) Ltd       | Tel: +27 31 461 3411  | Fax: +27 31 461 3475  | Email: <a href="mailto:southafrica@flowcrete.com">southafrica@flowcrete.com</a> |
| USA          | Flowcrete North America Inc. | Tel: +1 936 539 6700  | Fax: +1 936 539 6701  | Email: <a href="mailto:usa@flowcrete.com">usa@flowcrete.com</a>                 |

### Sales Centres

|               |   |                         |                         |   |
|---------------|---|-------------------------|-------------------------|---|
| Australia     | Flowcrete Australia Pty Ltd                 | Tel: +61 7 3205 7115    | Fax: +61 7 3205 3116    | Email: <a href="mailto:australia@flowcrete.com">australia@flowcrete.com</a>   |
| Baltic States | Flowcrete Baltics                           | Tel: +37 1 2864 4666    | Fax: +48 22 879 8918    | Email: <a href="mailto:latvia@flowcrete.com">latvia@flowcrete.com</a>         |
| Canada*       | Flowcrete Canada                            | Tel: +1 936 539 6700    | Fax: +1 936 539 6701    | Email: <a href="mailto:canada@flowcrete.com">canada@flowcrete.com</a>         |
| China         | Flowcrete China                             | Tel: +86 10 8472 1912   | Fax: +86 10 8472 1942   | Email: <a href="mailto:china@flowcrete.com">china@flowcrete.com</a>           |
| Denmark       | Flowcrete Sweden AB                         | Tel: +45 3155 7882      | Fax: +46 42 15 50 90    | Email: <a href="mailto:denmark@flowcrete.com">denmark@flowcrete.com</a>       |
| France        | Flowcrete France SAS                        | Tel: +33 1 60 61 74 42  | Fax: +33 1 64 33 11 61  | Email: <a href="mailto:france@flowcrete.com">france@flowcrete.com</a>         |
| Hong Kong     | Flowcrete (Hong Kong) Ltd                   | Tel: +852 2795 0478     | Fax: +852 2795 4842     | Email: <a href="mailto:hongkong@flowcrete.com">hongkong@flowcrete.com</a>     |
| Indonesia     | Flowcrete Indonesia                         | Tel: +62 21 252 3201    | Fax: +62 21 252 0720    | Email: <a href="mailto:indonesia@flowcrete.com">indonesia@flowcrete.com</a>   |
| Mexico*       | Flowcrete Mexico                            | Tel: +1 936 539 6700    | Fax: +1 936 539 6701    | Email: <a href="mailto:mexico@flowcrete.com">mexico@flowcrete.com</a>         |
| Norway        | Flowcrete Norway AS                         | Tel: +47 6486 0830      | Fax: +47 6486 0831      | Email: <a href="mailto:norway@flowcrete.com">norway@flowcrete.com</a>         |
| Romania*      | S.C. Flowcrete Romania s.r.                 | Tel: +40 374 00 80 78   | Fax: +40 21 255 03 15   | Email: <a href="mailto:romania@flowcrete.com">romania@flowcrete.com</a>       |
| Russia*       | Flowcrete RUS                               | Tel: +7 (495) 645 83 18 | Fax: +7 (495) 645 83 18 | Email: <a href="mailto:rus@flowcrete.com">rus@flowcrete.com</a>               |
| South Korea*  | Fcrete Corporation                          | Tel: +82 2 2649 3874    | Fax: +82 2 2649 3878    | Email: <a href="mailto:southkorea@flowcrete.com">southkorea@flowcrete.com</a> |
| Thailand      | Flowcrete International (Thailand) Co.,Ltd. | Tel: +66 2539 3424      | Fax: +66 2539 3427      | Email: <a href="mailto:thailand@flowcrete.com">thailand@flowcrete.com</a>     |
| UAE           | Flowcrete Middle East FZCO                  | Tel: +97 14 886 4728    | Fax: +97 14 886 4582    | Email: <a href="mailto:uae@flowcrete.com">uae@flowcrete.com</a>               |
| Vietnam       | Flowcrete Vietnam                           | Tel: +84 8 38216561     | Fax: +84 8 3821 6501    | Email: <a href="mailto:vietnam@flowcrete.com">vietnam@flowcrete.com</a>       |

\*Partner Company

Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, Flowcrete reserve the right to change product specifications at any time without prior notice. The photographs and colours reproduced in this publication are within the constraints of the printing process and are not to be used for matching purposes. All photographs are used for approximate representation only and may not show the actual products on offer. E&OE.